

## Round Grab


- The Strong Combination of Grab and Sling for the Safe Handling of Cylindrical Parts (Pipes, Cylinders ...)



### Sling or Pipe Grab ?

**Slings** can be used for handling pipes when the pipes are positioned on a squared beam and when the sling can be pushed through underneath the pipe. The advantages of the slings are, however: high carrying capacity, lightweight and inexpensive.

**Pipe Grabs** are mechanical grabs. They are very solid and assure safe pipe handling. A complete encircling of the load is not necessary as the load is held by frictional and embracing forces.

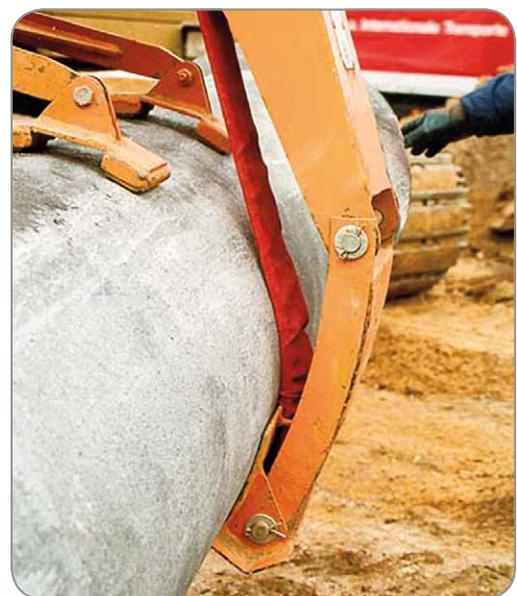

## ► Supporting Equipment

### Why not combine both advantages in one single piece of equipment ?

#### Round Grab WRG:

The solid steel construction assures safe pipe handling even under the toughest circumstances. Due to the built-in automatic mechanism, the round grab opens and closes automatically when picking up or positioning the pipe. The large clamping range is quickly and simply adjusted via a bolt. A control panel guarantees the correct adjustment of the clamping range. The easily adjustable support provides additional safety during handling. The solid suspension eye can be fitted into any lifting equipment.

The wide slings assure careful and safe transport even of delicate or coated pipes. The slings are covered with a protective tube. The slings are additionally protected against wear and tear by protective plates situated at the bottom.

Application made for patent rights.

Model	WRG 1,5 - 47	WRG 1,5 - 80	WRG 5 - 150
Carrying Capacity (kg)	1,500	1,500	5,000
Pipe Outside Diameter (mm)	200 - 470	300 - 800	600 - 1,500
Height H (mm)	930	1,350	2,300
Width B (mm)	340	350	500
Z* (mm)	110	120	200
Weight (kg)	56	90	425

#### Round grab with steel sling and steel tensioning sling

Model	RRG 3 - 120	RRG 10 - 200	RRG 12 - 250
Carrying Capacity (kg)	3,000	10,000	12,000
Pipe Outside Diameter (mm)	600 - 1,250	1,000 - 2,000	1,500 - 2,500
Height H (mm)	2,000	3,000	3,600
Width B (mm)	550	750	750
Z* (mm)	120	300	400
Weight (kg)	300	1,080	1,450

Enquire about our special constructions. \* Adjustment to suit the max. diameter

