




## TM 18/22 B

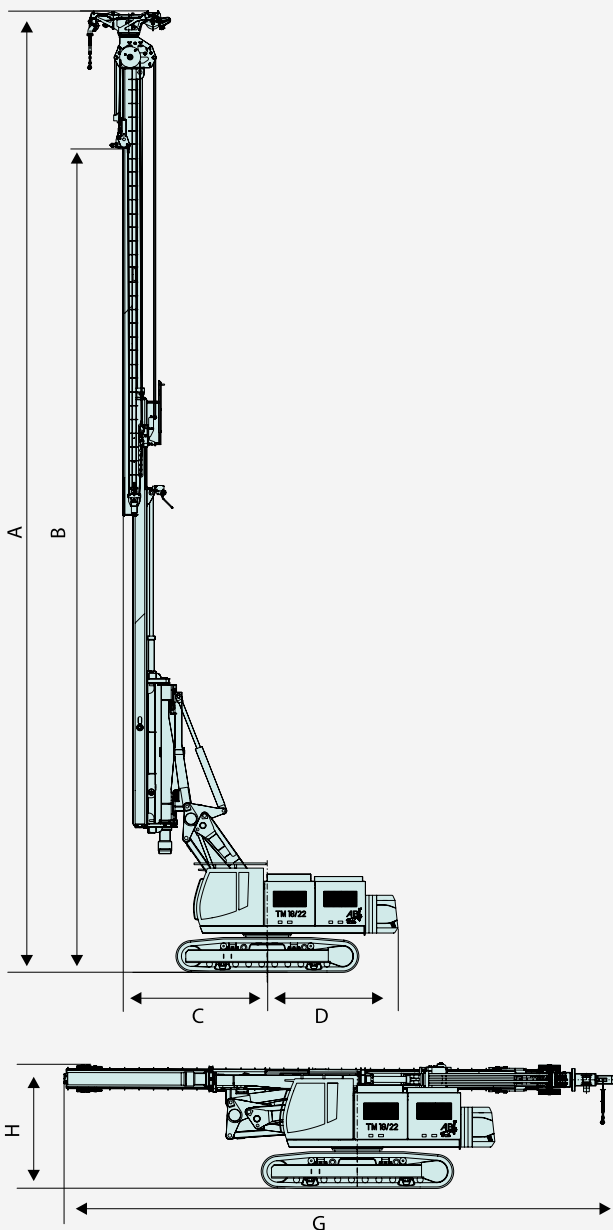

Technical data	Unit	TM 18/22 B
Leader inclination front/rear	degree max.	4/5
Leader inclination laterally	degree max.	4
Leader slewing range	degree max.	+/- 90
Prestressing force leader cylinder	kN max.	120
Extraction force leader cylinder	kN max.	200
Load capacity	kg max.	9000
Torque absorption	daNm	15000
Auxiliary winch lifting capacity	kN max.	50
Auxiliary winch rope speed	m/min	45
Weight - depending on carrier unit**	t approx.	67
<b>VIBRATOR</b>		<b>MRZV 30 VV</b>

\*\*Weight without attachment

Dimension	Unit	TM 18/22 B
A Height min./max.	mm	15000 - 28000
B Max. height up to rapid changing device	mm	24000
C Center to guide	mm	5340
D Center to back underground lowering depth	mm	3800
E Leader mast guide width	mm	550
F Leader mast width	mm	50
G Length / transport	mm	15200
H Height / transport	mm	3500
Width / transport	mm	3000

Base carrier	Unit	SR 35 T-D
Engine		CAT C18
Engine power TIER 3B	kW	470
Hydr. Volumenstrom	l/min.	2 x 370 1x125, 1x200
Nominal oil pressure	MPa	32
Fuel tank capacity	l	825
Hydraulic extendable undercarriage		
Pulling force	kN	450 / 540
Track gauge	mm	2300 - 3800
Track shoes width	mm	700*

\*Optional track shoes width 800, 900 mm