


## ► ABI Add-on vibrators

For smaller projects ABI offers attachments for hydraulic excavators. The add-on **vibrator HVR** is mounted at the dipper stick of a hydraulic excavator boom and driven by its hydraulic system.

Apart from characteristics like very short starting and stopping times, high revolutions, low noise level as well as low weight and high centrifugal forces, the HVR is characterised by a short design height. This advantage appears particularly in buildings, under bridges or power lines. Little usable length is lost due to its small design height. The add-on vibrator is used for piling and extracting sheet piles, trench sheets, steel beams and girders, pipes and casings as well as full displacement sections.

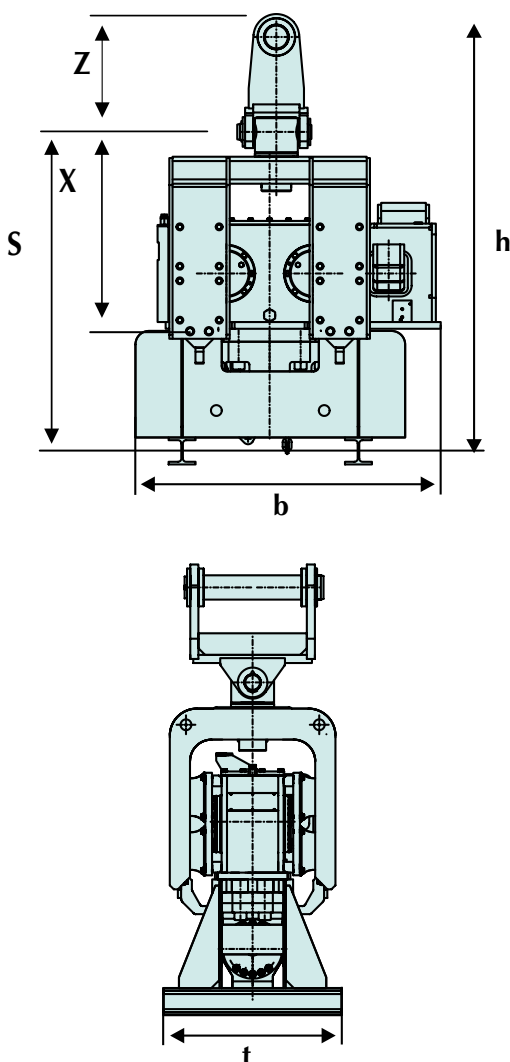

### ■ HVR 60

Technical data	Unit	HVR 60
Static moment	kgm	6
Dynamic mass	kg	920
Nominal revolutions	min <sup>-1</sup>	2460
Centrifugal force at nominal frequency	kN	400
Static extraction force max.	kN	40
Nominal oil pressure	MPa	32
Hydraulic flow rate	l/min	196
Hydraulic power at p max.	kW	100
Total weight / transport weight	kg	1260 / 1345
Weight of pile elements	kg	1000

Dimension / mm	HVR 60
H Height	1635
B Width	1070
T Depth	615
S Locking to bottom	1200
X Locking to vibrator body	820
Z Excavator connection standard	352
Transport dimensions	H / B / T
	1710 / 1185 / 660