

TWF TIEFBAUTECHNIK

Sales | Rental | Leasing



PRO-3G TWF RESCUE KIT

www.twf-tiefbautechnik.de

www.twf.at

OPERATING MANUAL

► PRO-3G TWF Rescue Kit

TABLE OF CONTENTS

Teileverzeichnis	2 - 3
System Introduction	4
Application	5
General System Requirements	6
System Installation	7 - 9
Training	10
System Usage	10
Inspection & Maintenance	10 - 11
Packaging	11
Labels & Markings	12 - 13
Product Specifications	13
Copy of EC declaration of Conformity	14

CE 0086




The product has been tested to:
EN795 & CEN/TS16415:2013 geprüft
and complies with the Basic Health
& Safety requirements of European
Directive 89/686/EC



- 1 Aluminium Box
- 2 Barrel mount
- 3 Lower mast
- 4 Upper mast
- 5 Davit boom
- 6 Rescue Recovery Winch mount bracket
- 7 Rescue Recovery Winch
- 8 Materials Winch



► Operating Manual

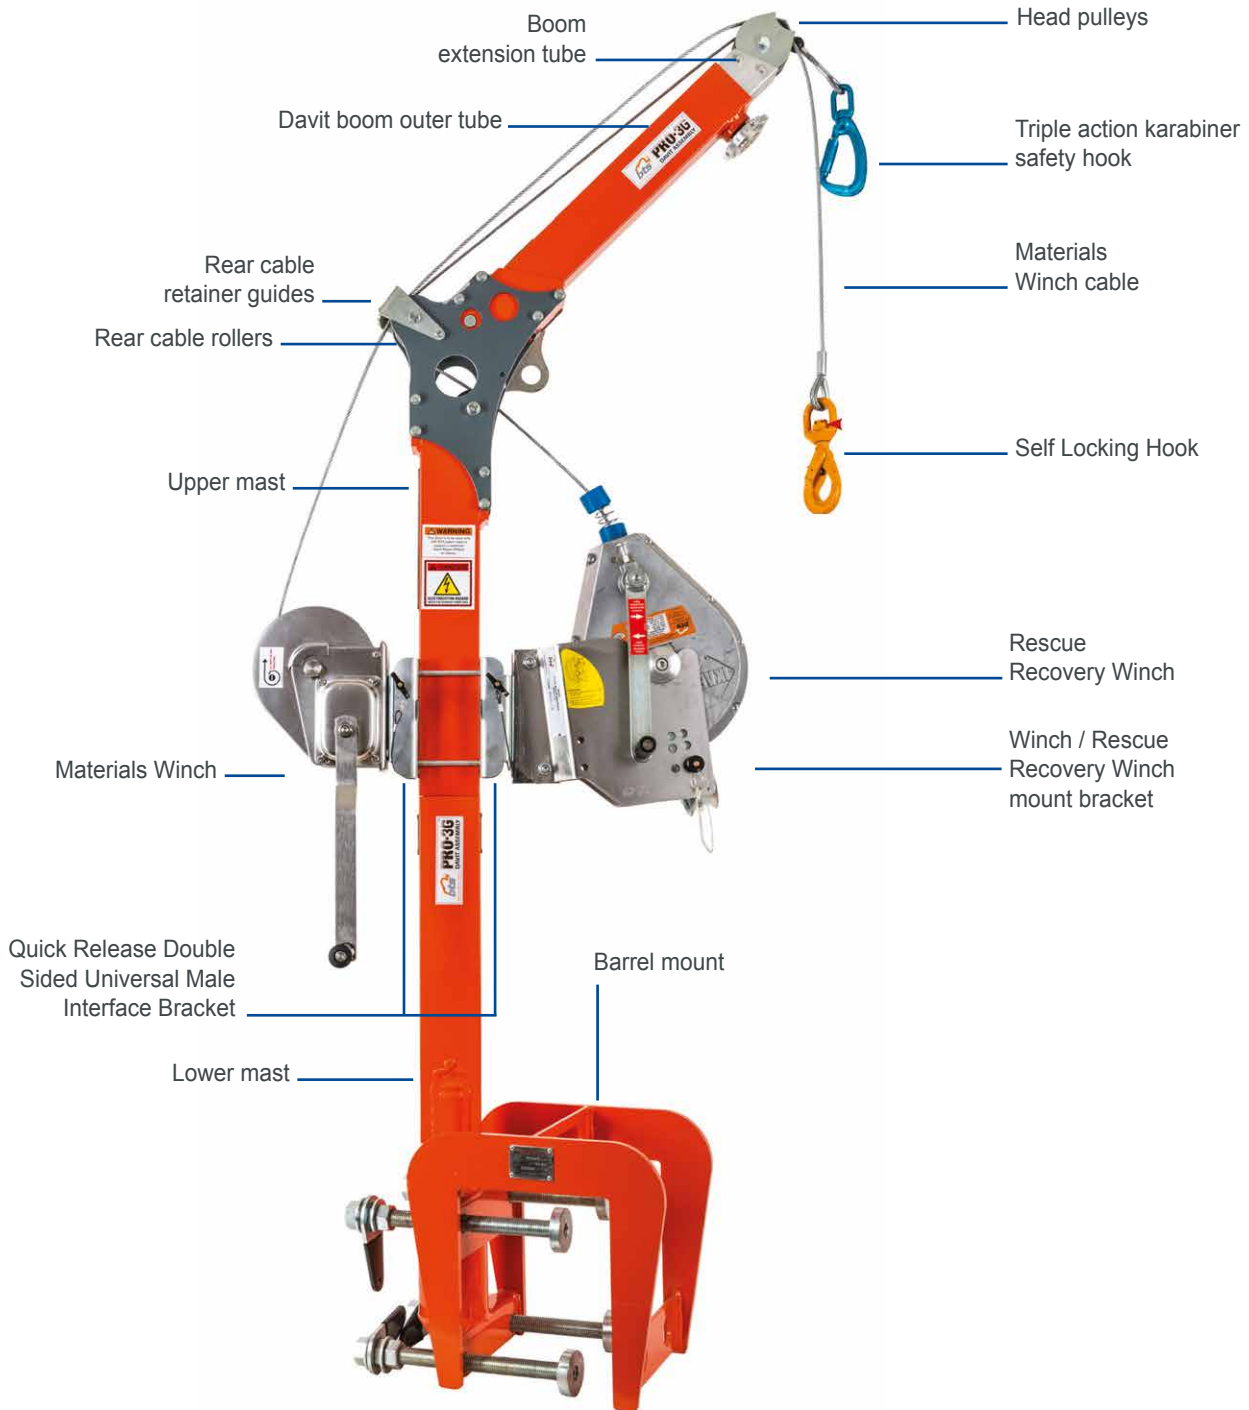

► PRO-3G TWF Shoring Kit

1. INTRODUCTION TO SYSTEM APPLICATIONS

The PRO-3G Davit Shoring Kit is designed to be mounted on a shoring/trench (steel or aluminium) panels to provide reliable operation in various applications at trenches and ground excavations. The Kit includes:

1. 1x Pro Davit Kit
2. 1x Steel Adjustable Barrel Davit Mount
3. Materials Winch
4. Rescue Recovery Winch

The product has been tested to EN795 & CEN/TS16415:2013 and complies with the Basic Health & Safety requirements of European Directive 89/686/EC

1.1. Specification

1 person weighing a maximum of 136kg including all clothing, tools and equipment connected to the HRA / Winch. The operator of the winch needs to be connected to the secondary anchor point on the mast using a type 3 SRL.



1.2 Safety Instructions prior to use

- All operating procedures have been read and understood.
- The Kit is only to be installed and used by a competent person who has been trained in safe use of the system.
- USE appropriate personal protective equipment (PPE) during installation, operation and maintenance of the equipment.
- All non-operational bystanders are to be kept clear of work areas.
- Always wear gloves and beware of pinch points during installation and operation.
- Be aware of soft or uneven ground near the excavation site and keep work area clear. Ensure all workplace OH&S requirements are identified and understood. A risk assessment complete with site specific safe work method procedure must be completed and approved by management prior to commencing the work.

- A rescue plan must be devised and be ready to be implemented prior to usage of the Kit.
- This product requires periodic inspection and maintenance by a competent person as per section 7 of this manual.
- The system must not be used if any part of it is overdue for service, inspection or damaged.
- Only an approved full body harness, certified is to be used with this Kit.
- The system is designed to be used for Limited Free Fall Arrest and requires that BTS Self Retracting Lifelines (SRLs) and HRA fall Arrest Recovery Device be used. HRAs & SRLs selected for use with this system must have a Maximum Arrest Force (MAF) rating of 4kN or less.
- The PRO-3G Davit is only to be used with the provided Davit barrel mount that is rated to support a maximum davit reach (offset) of 740mm.
- Visually inspect the product for damage prior to use. The system must not be used if there is any deterioration or deformation of any component or the structure to which the system is attached. If the Davit mast shows signs of overload or fall, immediately tag the system "Out of Service" and do not use until it has been fully inspected and recertified by a competent person..
- Persons with muscular, skeletal and physical disorders should consult a physician before using Personal Fall Protection Equipment. Increasing age or lowered physical activity may reduce a person's ability to use this equipment.
- This user manual does not in any way replace the need for completion of a recognised height safety training course.

1.3. Site Hazards

Sites have associated with them many hazards which must be considered before using any equipment or performing tasks. These include but are not limited to:



► Operating Manual

- Overhead powerlines, transformers, underground power and solar power systems
- Gas lines (both underground and surface)
- Ground collapse hazards
- Chemicals
- Plant and machinery
- Traffic – both vehicle and pedestrian

NOTE: Failure to follow all safety, installation, usage and maintenance instructions may result in serious injury or death.

2. APPLICATION

The Kit is designed to be used in various applications at ground excavation sites.

2.1 Fall Protection

The PRO-3G Davit is designed to be used with the Barrel Davit mount to provide an engineered supporting structure for Personal Fall Arrest Systems (PFAS).

2.2 Work Positioning

The Davit may be equipped with a material Winch or a Type 3 HRA Fall Arrest Recovery device to be used for the suspension of a worker at an elevated position for the performance of a task. The worker must wear a harness and if suspended in a work seat, a secondary personal fall arrest system must be used.

2.3 Rescue

The PRO-3G Davit Arm, base and winch may be used, employed as part of a system meeting the requirements of Australian Codes of Practice for the rescue of a fallen worker/s, BS EN 1496:2006 for the rescue of a fallen worker.

2.4 Confined Space Entry/Retrieval and Rescue

The PRO-3G Davit Arm, base and winch, may be used as part of a system to facilitate access to and egress from a confined space as well as non-entry rescue in the event of an emergency. When used with approved BTS mounting base and winch, the PRO-3G Davit System meets the requirements of Safe Work Australia, Confined Spaces Code of practice, EN795 & CEN/TS16415:2013, for use as a confined space entry/retrieval and rescue device.

2.5 Limitations

TWF recommends that any and all persons using this equipment do not work alone in case of an emergency and/ or help is required.

MUST BE READ PRIOR TO USE


Only to be used by persons with documented proof of training in the use of height safety and fall protection systems.

The B-TRENCHSAFE Davit Shoring Kit is suitable for a single user to be attached at any one time. Check system specifications or contact TWF for configuration limitations. Operator of the winch or Type 3 HRA is to be connected to the secondary anchor point on the mast.

Users of this system must be connected via an HRA/ SRL (compliant to AS/NZS1891.3, EN360:2002), which will limit any fall to less than 600mm. The system must be set up so that the user will not be offset by more than 30 degrees from vertical.

Do not modify any of the system components.

System only to be used for personal fall protection equipment and not for lifting equipment/material.

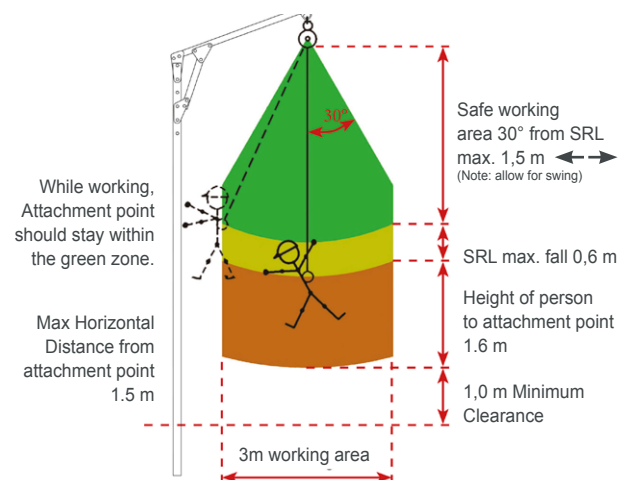

► PRO-3G TWF Shoring Kit

3. GENERAL SYSTEM REQUIREMENTS

3.1 Mounting requirements

Structure selected for the installation of the Davit base must be capable of supporting a minimum of 10,000N.m moment and 18kN vertical load or must be approved by a Competent person so as to an appropriate safety factor for the given application(s) specified in applicable regulations..

The system must be mounted keeping in mind the following information:

- Maximum deflection of the anchor device: 10-15mm as the Jib retracts during a fall
- Maximum displacement of the anchor point: less than 1 mm

3.2 Anchorage Strength

The PRO-3G Davit Arm is designed to be set up or installed and used on a supporting surface (anchorage) capable of providing sufficient anchorage strength to support all applied loads with an acceptable margin of safety. The standards governing different situations specify various minimum requirements depending on the application, the work being performed and other factors. However, at no time shall the anchorage provide any less than the greater of:

- 2:1 safety factor on the maximum arrest force (MAF) rating of any fall arrest system being used.
- 4:1 safety factor on personnel working loads applied to the system, as defined in the specific codes of practice & standards.

All installations MUST BE carried out under the supervision of a Competent Person

3.3 Connectors

All connectors used to connect components in the system must be compatible with each other to ensure sufficient strength and eliminate the risk of accidental disengagement or rollout during use. Connectors supplied with products designed, manufactured and/or approved by BTS meet all applicable requirements for connectors (refer to AS/NZS1891.1, AS/NZS1891.3 and EN 362:2004).

Any connectors not supplied by TWF MUST BE selected and approved by a competent person.

3.4 Full Body Harness

Use only a full body harness designed, tested and approved for fall arrest (refer to AS/NZS1891.1 or EN361:2002) when connecting a person to this system.

Warning: Body belts or straps MUST NOT be used, as they do not provide adequate restraint / support to the body and may cause serious injury or death in the event of a fall.

3.5 Fall Protection

Activities involving working at heights require the use of Personal Protection Equipment (PPE) to protect the worker in the event of a fall. Suitable fall protection must be provided as required by applicable local regulations when using this equipment. Fall protection equipment **MUST** be selected and installed under the supervision of a Competent Person.





► Operating Manual

4. SYSTEM INSTALLATION

- The system can only be installed by a trained/competent person that has fully read and understood this manual. As the system is to be installed at an elevated level, on the edge of an excavation protected by a shoring system, a number of licences and qualifications may be required under site specific requirements, Local, State and Federal law. The system is only as strong as the structure/shoring box that it is mounted on; therefore, it is imperative that the shoring be installed as per the manufacturer's instructions.
- Please note that Installation records need to be kept and maintained by the user for future installations and inspections. This record must include information such as details of the installer, the address and location of installation, product identification and procedures and/or product or tools used for the installation. This document must be signed off by the installer. For further details, please refer to AS/NZS1891.4 Section 9.10 or Annex A.2 of EN795:2012
- Inspect the components for wear and damage that may have been sustained either in use or during transport. If any of the components are damaged or deemed unfit for purpose, tag them "Out of Service" and contact your supervisor prior to commencing installation.
- Before mounting the B-TRENCHSAFE PRO-3G Davit Shoring Kit, ensure that the shoring has been installed as per the manufacturer's instructions. At this point check also that the soil around the shoring box is stable (look for fissures, cracks, signs of water, services or previous excavations) and make an assessment of the potential for ground collapse.

If there is any doubt as to whether it is safe to proceed, seek the guidance of a suitably qualified person.

Note: Person installing the product may require to be connected to a separate fall arrest device if exposed to fall hazards.

1. Install the Barrel Mount over an approved supporting structure. Tighten the clamp screws to 65 Nm or as deemed tight enough by a competent person using the integral handles provided. Do not use larger tools or any kind of an extension on these handles.
2. Install the Davit into the Barrel Mount base.
3. Adjust the offset of the davit as required by loosening the Clamp Knob, sliding the Boom extension tube to the required position and then tightening the knob to lock boom extension in position. Tighten the clamp knob until the internal ratchet clicks at least twice to ensure proper engagement of the overload indicator.
4. Install the hand winch and/or the rescue winch.

Quick Setup Guide

1



Install the Barrel Mount over an approved supporting structure. As per instructions (point 1) above

2




Install the Lower Mast into the barrel mount.

3



Install the Upper Mast into the Lower Mast.

4

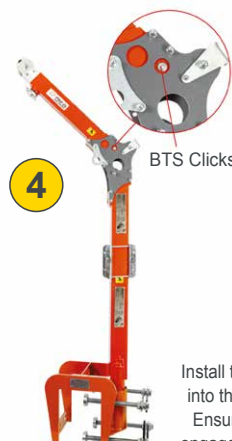

Install the Davit Boom into the Upper Mast. Ensure BTS Clicks engage on both sides.



► PRO-3G TWF Shoring Kit

Quick Setup Guide



Install the Rescue Recovery Winch Bracket onto the fixed Quick release bracket located on the boom side of the davit. Ensure the bracket engages with the bar on the bottom of the bracket on the Davit.



Lift Bracket up, line up top holes & insert locking pin



Remove Rescue Recovery Winch locking pin from Bracket and allow to hang



Install Rescue Recovery Winch into bracket, Ensure bracket is located correctly on both sides of Rescue Recovery Winch and rescue handle is on right hand side facing pit.



Line up hole in Rescue Recovery Winch hanger and Rescue Recovery Winch Davit Bracket and replace locking pin



Push the Rescue Recovery Winch hook through the front mount redirect roller opening and locate the cable onto the roller. Then feed the cable between the guides and over one of the rear cable roller



Now feed the cable between the guides and over one of the boom tip cable rollers. Ensure that you use the same side roller as on the rear cable roller

Note: The Rescue Recovery Winch is NOT to be used for Lifting or Lowering of materials. It is for personnel recovery only



► Operating Manual

Stainless steel material hand brake winch assembly


Stainless Steel Load Brake Winches Capacity: 140Kg (Lifting).
COMPLIES WITH AS1418.2 and BS EN 13157: 2004 + A1: 2009 as well as the corresponding EC declaration of conformity 2006/42 / EG / 11A.

**MATERIALS WINCH MUST NOT BE USED FOR LOWERING OR LIFTING PERSONNEL.
VERWENDET WERDEN!**

Product features

- Compact design.
- Stainless steel construction Grade 304.
- Automatic breaking system- no free wheeling under load.
- Fully enclosed gear train.
- Suitable for marine environments.
- Minimum handle effort to lift or pull W.L.L (Working Load Limit)
- C/w 18m x 6mm 7x19 H.D.G Grade G2070 Wire rope
- C/w 6mm Grade 80 Eye Swivel Self Locking Hook
- Quick Release Single Universal Interface Bracket c/w "T" locking pin & lanyard

Quick Setup Guide. Optional Materials Winch

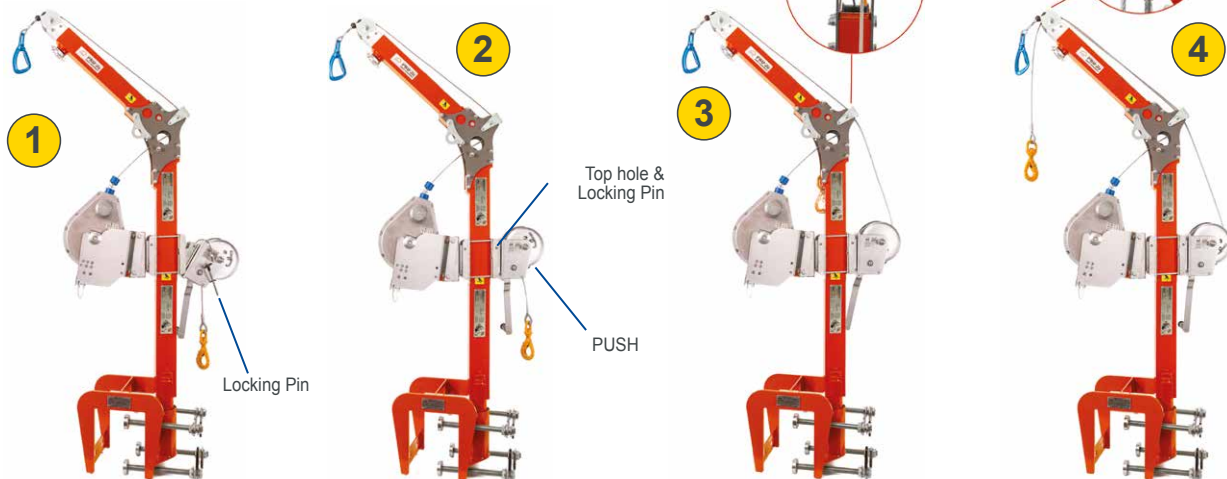

Install the Materials Winch onto the fixed Quick release bracket located on the outside of the davit. Ensure the bracket engages with the bar on the bottom of the bracket on the Davit.

Lift Winch up, line up top holes & insert locking pin

Release enough cable to reach the top of the davit boom, then feed the cable through the guides and over the free rear cable roller, then continue to the boom tip cable guides and onto the free roller as shown above.



► PRO-3G TWF Shoring Kit

5. TRAINING

All persons using this equipment must receive appropriate training from their employer on all equipment involved prior to operating. Users must also read and fully understand this manual and any other instruction manual(s) relating to the system being used, or have the instructions fully explained to them before using this equipment.

Additionally, users must be properly trained in the use of any accessories that are to be used with the davit shoring kit, as well as fall protection, confined space safety and any other procedures that are applicable to the work being performed; in compliance with local regulations.

Note: Documented training records should be kept for all users of this equipment.

6. SYSTEM USAGE

- Before using the system, ensure that free space beneath the workplace/Davit is calculated to achieve minimum required clearance, so that, in case of a fall, there will be no collision with the ground or other obstacle in the fall path. This includes 1m clearance, limited fall arrest distance of the device used and stretch in the harness.
- Fit a full body harness (compliant to AS/NZS1891.1, EN361:2002) and ensure that the harness is fitted as per the manufacturer's instructions. Never use a harness that is not adjusted correctly as it does not provide adequate support in the event of a fall.
- Connect the HRA's/SRL's hook to the Dorsal Dee ring of the harness, if you cannot see that the connection has been done correctly, have another worker confirm that the hook is in the correct location and closed properly. Please read the operators manual for this item prior to use.
- Using winch to retrieve the personnel from the excavation. Please read Operator's instructions for the Winch provided by its manufacturer.

7. ÜBERPRÜFUNG UND WARTUNG

The system must be inspected by a competent person before each use and periodically on a scheduled basis. Any problems must be reported immediately to the supervisor and the equipment tagged "Out of Service" to prevent further use until it has been repaired.

7.1. SPECTION and MAINTENANCE

- Inspect the system and all accessories for physical damage, bent parts etc. that may have been caused by an excavator or other plant on the job site. Check also for loose or missing hardware and missing or illegible labels (Refer to section 8 for Labels and Markings). Replacement labels and accessories for all TWF products are available from your equipment supplier.
- Inspect the pulleys on the Davit to ensure they are clean and rotate freely.
- Inspect the Davit arm to check if there are any signs of a fall that might have occurred. Before each use ensure the Overload Indicator is properly engaged by following the following steps:
 - Fully extend and lock the Boom Extension Tube as described in Section 4.
 - Install a Winch, HRA or SRL on the structure as per the applicable instructions.
 - Pull with your full body weight on the lifeline and make sure there is no movement of the extension tube. If using a HRA or SRL, apply a sharp, steady pull on the lifeline to engage the SRL brakes and then pull on the lifeline to test the Overload Indicator.

Note: Do not test Overload Indicator over an opening or where there is a chance of falling. When conducting this test with an SRL, the test should be applied to the lifeline above the snap hook to eliminate any damage over time to any integral overload indicator in the hook itself.



► Operating Manual

- Barrel Mount base must be cleaned and inspected before each use. Check that all four clamping screws on the barrel mount base are secure and that the base is sitting level on top of the shoring.
- If used with a Winch, ensure the Winch bracket is secure to the Davit Post. Use Winch Operation/inspection manual for its inspection and maintenance.
- If used with a HRA a visual inspection and functional test of the HRA fall arrest block must be performed before every use. To do so, attach the fall arrest block to a suitable anchor point: Pull the rope, the ratchets must lock audibly and the device must be locking. Firmly hold the rope and allow it to retract into the fall arrest block in a controlled manner. See the operators manual for further information

7.2. Annual Inspection & Maintenance

At least annually, the Kit needs to go through a detailed inspection by a competent person following the inspection procedure outlined in Section 7.1 and the results recorded in an Inspection Log (a sample log is provided on page 9).

Note: The Inspection plate on the Davit needs to be marked with the date of inspection and date of next inspection

7.3 Inspection of IKAR HRA Rescue / Retrieval Handle Wire Seal

The IKAR HRA (Rescue Retrieval Winch) has a Wire seal that prevents the handle from being used as a materials winch.

If the seal is broken, it will indicate that a rescue has been performed with this HRA & that an incident report has been filled out and documented in the provided inspection log. 8. Packaging For transportation or storage, ensure the system is disassembled and stored in the Heavy Duty Storage Bag provided with the kit.



Hinweis: The Rescue Recovery Winch is NOT to be used for Lifting or Lowering of materials. It is for personnel recovery only

8. PACKAGING

For transportation or storage, ensure the system is disassembled and stored in the Heavy Duty Storage Bag provided with the kit.




TWF TIEFBAUTECHNIK

Sales | Rental | Leasing

► PRO-3G TWF Shoring Kit

9. LABELS & MARKINGS

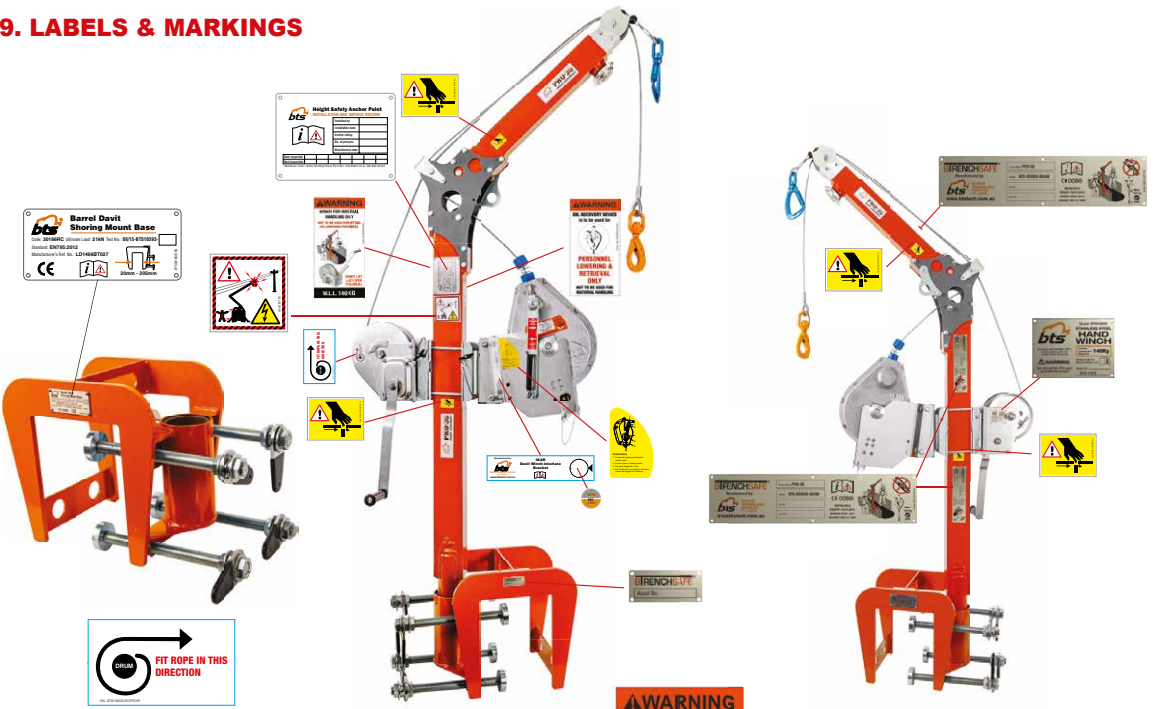

MATERIALS WINCH LBL-BTW1800S-ROPEDIR




MATERIALS WINCH ID Plate




Asset No. Plate




Winch for MATERIAL HANDLING ONLY MAX 140KG




SRL (Self retracting lanyard) Recovery Device is to be used for PERSONNEL LOWERING & RETRIEVAL ONLY




Barrel Davit Mount identification plate / Read instructions before use



Installation & Inspection plate / Read instructions before use

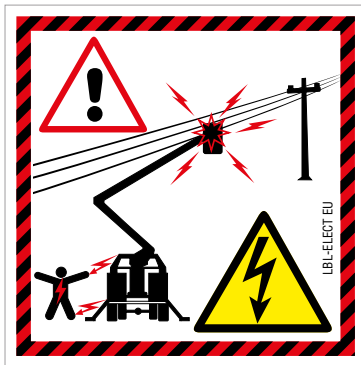

WARNING Check for overhead powerlines before use

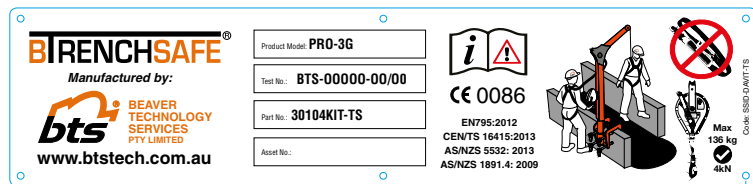


Davit identification plate / Read instructions before use

09-2023



► Operating Manual

9. LABELS & MARKINGS

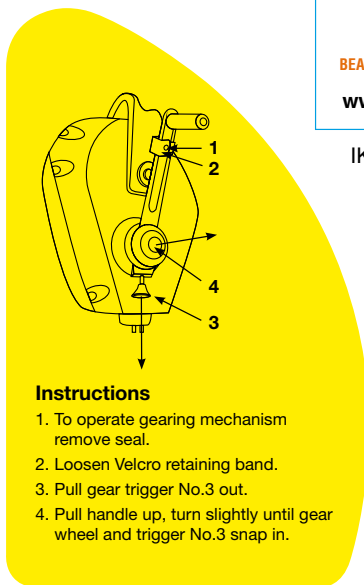

Instructions

1. To operate gearing mechanism remove seal.
2. Loosen Velcro retaining band.
3. Pull gear trigger No.3 out.
4. Pull handle up, turn slightly until gear wheel and trigger No.3 snap in.

IKAR Instruction label



IKAR Davit winch interface bracket and service due / Warning
read instructions before use label



IKAR Date of next
service label

10. PRODUCTSPECIFICATION

PRO-3G Davit

Weight: 22.6kg

Overall dimension: Height – 2167mm & Width – 1110mm

BTRENCHSAFE® Steel Adjustable Barrel Davit Mount

Weight: 25.2kg

Overall dimension: 376mm x 354mm x 265mm

Packaging Dimension (Heavy Duty Carry Bag)

1200 mm x 450 mm x 550 mm

Total Weight

85 kg



► PRO-3G TWF Shoring Kit

11. COPY OF EC DECLARATION OF CONFORMITY

Beaver Technology Services
142-147 Magowar Road
Girraween NSW 2145
Australia

Declares that the new PPE,

BTENCHSAFE® Pro-3G Davit Shoring Kit

is in conformity with the provisions of Council Directive 89/686/EEC and, where such is the case, with the national standard transposing harmonized standards

EN795:2012 Type B Anchor device

And is identical to the PPE which is the subject of **EC certificate of conformity No. CE 656227** issued by

British Standards Institution
Kitemark Court
Davy Avenue
Knowhill
Milton Keynes
MK5 8PP

and is subject to the procedure set out in Article 11 point B of Directive 89/686/EEC under the supervision of the approved body **British Standards Institution**

Done at **Beaver Technology Services, 142-146 Magowar Road, Girraween 2145**

On **26 September 2016**

NOTES:

1. A record of this product needs to be maintained by the user organisation or individual as per section 4.6 of EN365:2004
2. If the system is re-sold in another country, this Operating and Safety Instruction manual must be translated to an Official language of the destination country.



www.btstech.com.au



Read Instruction Manual before using.



WORLD RECOGNISED
ACCREDITATION



© Copyright Beaver Technology Services Pty Limited 04/2018 BOC - TS - Pro-3 Davit Shoring Kit PRO-3-DAVIT-SB- Rev.2_1



► Operating Manual

TWF PRO-3G Davit Shoring Kit - Inspection Log

Product Model No.: Date of Manufacture (dd/mm/yy): / /

Product Serial No.: Purchase Date (dd/mm/yy): / /

INSPECTION ITEM	Inspection		DETAILS Location of damage	DISPOSITION / repaired / scrapped	APPROVED for USE by:
	pass	fail			
Check the kit - ensure it is free of dents, distortion, cracks, corrosion or other damage					
Inspect the pulley on Davit to ensure it is clean and rotates freely					
Inspect Davit arm and ensure the Overload indicator is properly engaged and there are no indications of fall					
Ensure the clamp screws open & close properly					
Inspect all bolts and nuts – ensure they are secure and none missing, substituted or altered					
Ensure all labels are secure and legible (refer to section 8)					
Inspect the system components (SRL, Winch, Carabiners, etc.)					

If inspection or operation reveals a defective condition, remove the Davit System from service immediately and contact an authorized service centre for repair.

Date of Inspection:

Inspected By:

Date of Next Inspection:

The information set out in this manual has been compiled from supplier reference data including third party sources. TWF believes that the information is accurate and reliable, though we do not make or give any warranty (other than implied by statute which may not be excluded) with respect to the information. By using this information, the user undertakes not to hold TWF liable or responsible in any way whatsoever in relation or consequential to such use.



TWF TIEFBAUTECHNIK

Sales | Rental | Leasing



PRO-3G TWF RESCUE KIT

TWF Tiefbautechnik GmbH

Düsseldorfer Straße 2, D-52525 Heinsberg, Germany

T: +49 2452 15678-0

F: +49 2452 15678-19

office@twf-tiefbautechnik.de

www.twf-tiefbautechnik.de

TWF International GmbH

Klingerstraße 8, A-1230 Wien

T: +43 1 8653333

F: +43 1 8653333-33

office@twf.at

www.twf.at

OPERATING MANUAL